

NT40E2-4 Capture for Ethernet and SONET/SDH 4-Port 10 G Ethernet PCIe Gen2

DATA SHEET


Double Packet Capture and Replay Port Density

The NT40E2-4 Capture and Replay Adapter provides full packet capture of Ethernet and SONET/SDH (POS) traffic with zero packet loss for all frame sizes. Packet analysis and replay can be performed at full PCIe Gen2 bandwidth.

Intelligent features for flow identification, filtering and distribution to up to 32 CPU cores accelerate application performance while consuming less than 1% of CPU resources.



NT40E2-4: 4 x 10 Gbps PCIe Gen2

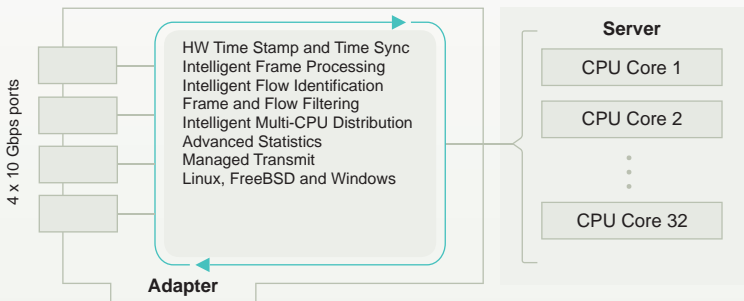

Feature Highlights and Applications

Feature Highlights

- 4 x 10 Gbps SFP+ connection
- Ethernet and packet over SONET/SDH
- 40 Gbps burst traffic capture with zero packet loss
- 300 ms of onboard data burst buffering
- 25 Gbps packet analysis & replay (PCIe Gen2 limit)
- Less than 1% host CPU load
- High precision 10 ns time-stamping
- GPS, CDMA and 1588 time synchronization
- Intelligent features for application acceleration
- 10 ns control of IFG for transmitted frames
- Ethernet FCS and IP/UDP/TCP checksum generation
- On-the-fly fully reconfigurable setup
- Easy-to-integrate API
- LibPCAP and WinPCAP support

Napatech-Supported Applications

The Napatech Capture Adapters enable OEM vendors to build high-performance network appliances based on standard servers. Examples of applications include:

- Network Performance Monitoring
- Flow Analysis of any IP end-to-end traffic
- Data Recording of network traffic
- Data Retention, Logging and Forensic Analysis
- High-Precision Latency Measurement
- Lawful Intercept
- Intrusion Detection
- Network QoS Assurance for media streams
- Transaction Performance Analysis

Specifications

General Features

- Full-line-rate processing for all frames from 64 to 10,000 bytes
- IEEE standard: IEEE 802.3 10 Gbit/s Ethernet LAN PHY and packet over SONET/SDH 10G WAN PHY support
- Physical interface: 4 SFP+ ports
- Supported SFP+ modules: Multi-mode SR (850 nm), single-mode LR (1310 nm)
- Data rate: 4 x 10 Gbit/s
- PCIe performance: 25 Gbit/s
- CPU utilization:
 - < 1% of the CPU is used for any data transfer
 - 0% of the CPU is used for any onboard processing
- Time formats: PCAP-ns/-μs, native, NDIS 10 ns/100 ns, UNIX 10 ns

Software

- Linux kernel 2.6: 32-/64-bit
- FreeBSD 7.x: 32-/64-bit and 8.0: 32-/64-bit
- Windows Server 2003/2008: 32-/64-bit, Windows XP: 64-bit and Windows 7: 32-/64-bit
- API supporting user level applications
- LibPCAP and WinPCAP support
- SDK tools included in source code for debugging and prototyping and as examples of how the adapters are used

Host Interface

- Bus type: 8-lane 5 GHz PCIe Gen2
- Data transfer modes:
 - Bus master DMA
 - Memory write or memory read transactions
- Support for 32-/64-bit addressing and host DMA addressing

Statistics

- RMON1 counters plus jumbo frame counters per port
- Frame and byte counters per filter and per host buffer
- Counter sets always delivered as a consistent time-stamped snapshot

Adapter Hardware

- Flash: Supports two boot images
- 2 GB onboard DDR3 RAM
- Physical dimensions: ½-length low-profile PCIe

Environment

- Power consumption: 31.6 Watts typ. including SFP+ SR modules
- Operating temperature: 0 °C to 45 °C (32 °F to 113 °F)
- Operating humidity: 20% to 80%
- Hardware compliance: RoHS, UL, CE, FCC, CSA, VCCI, C-TICK

Company Profile

Napatech develops and markets the world's most advanced programmable network adapters for network traffic analysis and application off-loading. Napatech is the leading OEM supplier of Ethernet network acceleration adapter hardware. Napatech is fully focused on providing the most cost-effective hardware acceleration solutions for Gigabit Ethernet connectivity, increasing our customers' ability to keep their competitive advantage, while maintaining the flexibility and cost position of standard server equipment and operating systems.

Napatech provides unmatched value-add to our OEM customers by offering a very flexible feature set and a highly scalable range of network adapters. With easy-to-use APIs, Napatech adapters enable effective integration of Network Monitoring, Network Security, Network Control and Assurance, and Network Traffic Generation appliances. Napatech has a strong international focus supporting OEM customers worldwide.

Europe, Middle East and Africa

Napatech A/S
Tobaksvejen 23 A, 1
DK-2860 Soeborg
Denmark

Tel. +45 4596 1500
Fax +45 6980 2970
www.napatech.com
nteusales@napatech.com

Americas

Napatech, Inc.
One Tech Drive
Suite 110
Andover, MA 01810
US

Tel. +1 888 318 8288
Fax +1 978 824 9414
www.napatech.com
ntamericassales@napatech.com

APAC

Napatech
1/F Place Canada
7-3-37 Akasaka Minato-ku
107-0052 Tokyo
Japan

Tel. +81 3 6894 7678
Fax +81 3 6894 7701
www.napatech.com
ntapacsales@napatech.com